
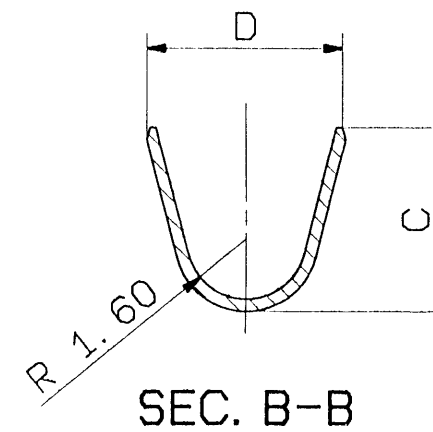



PART NO.	A	B	C	D	E	WIRE SIZE	REFERENCE
7116-2090	3.5	3.7	4.9	5.5	1.1	AV 0.5 ~ 2	
7116-2090-02	3.5	3.7	4.9	5.5	1.1	AV 0.5 ~ 2	Sn PLATING
7116-2092	4.5	4.7	5.9	6.5	1.4	AV 3	
7116-2092-02	4.5	4.7	5.9	6.5	1.4	AV 3	Sn PLATING

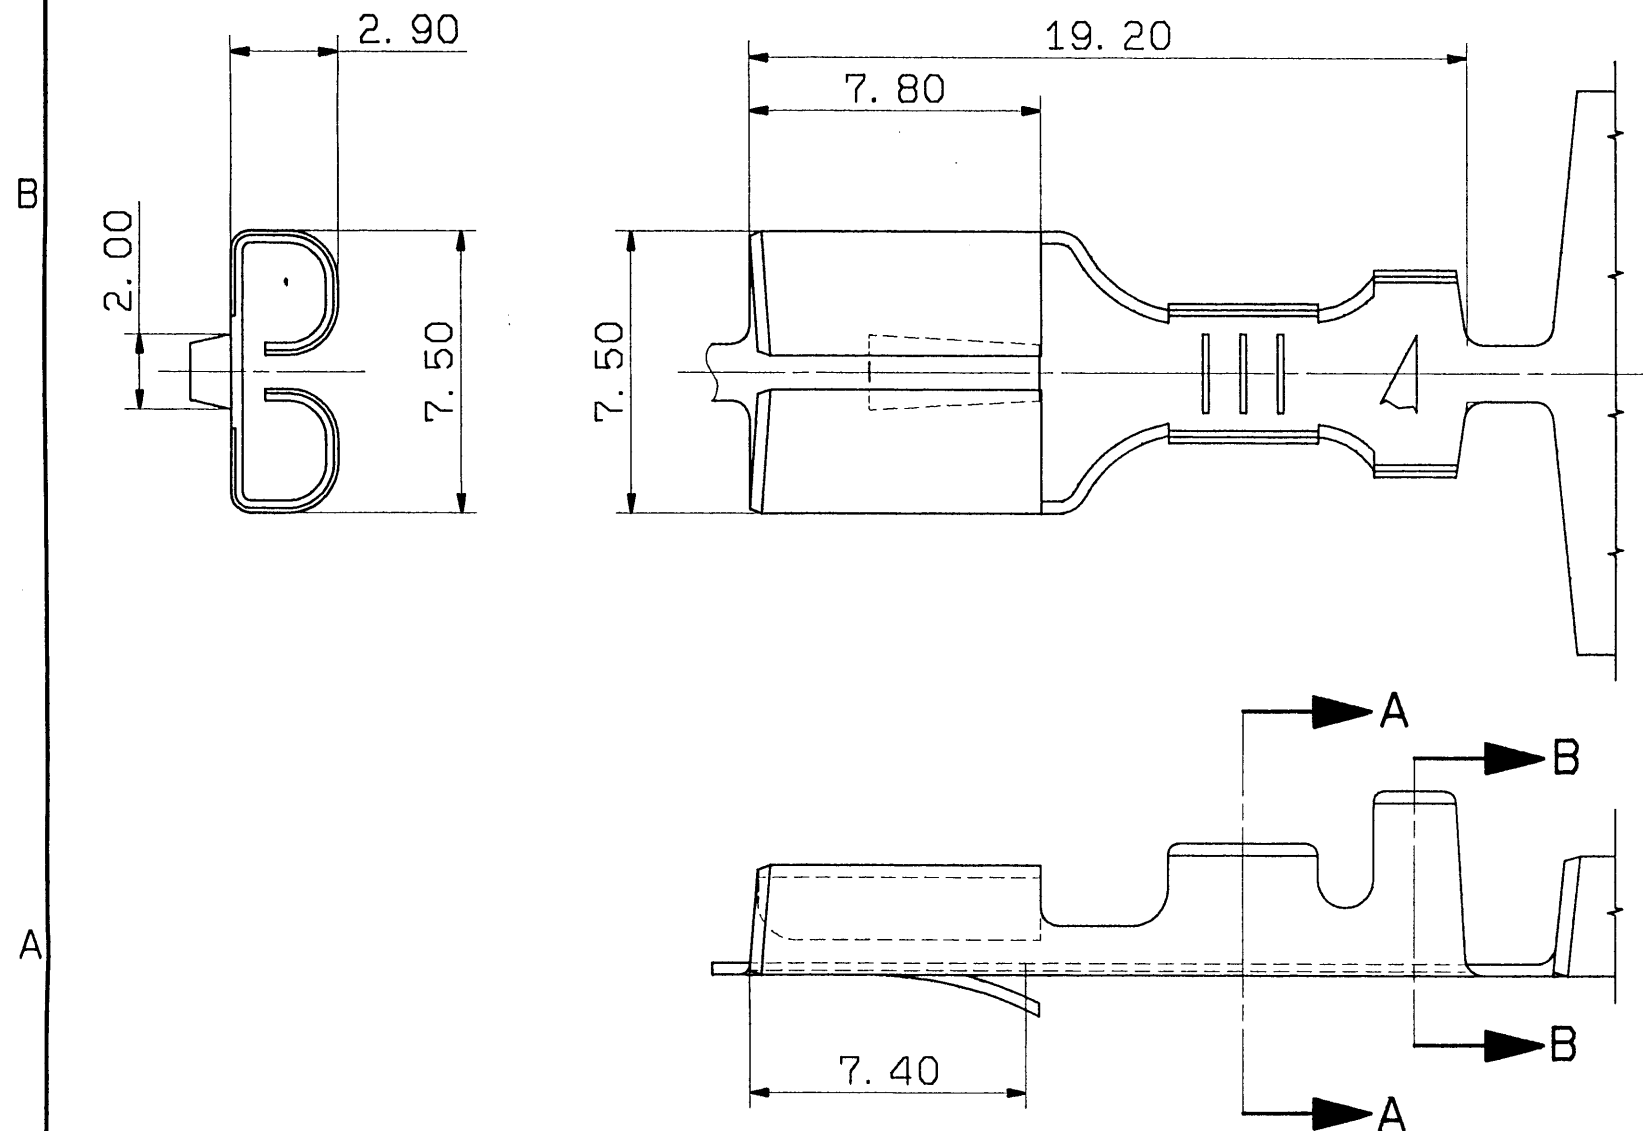

ISSUE MARK

								CUSTOMER						MATL. SPEC. C2600R t=0.32				TREAT. & FIN.					
								CUSTOMER PART NO.				CUSTOMER DWG NO.											
94.06.01 RENEW C94-L003 N. S								OFFICE				TRIAL PART NO.						NAME 250 (6.0mm)TERMINAL					
LET DATE REVISION RECORD NO. CHKD								VENDOR										FEMALE					
GENERAL TOLERANCE								VENDOR NO.															
10MAX 50MAX 100MAX 250MAX 2500VR ANGLE ECCENT								DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE		PART NO. 7116-2090 ETC.			
A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30' 0.1								R		RENEW		94.06.01		mm		5/1		3		CH. CODE			
B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±30' 0.1								APPROVED		CHECKED		CHECKED		DESIGN		DRAWN		DWG NO. 7116-2090:R					
C ±0.3 ±0.5 ±0.8 ±1.4 ±2 ±30' 0.15								酒井		増田		竹下		ISHIZAKI		KUZUNO							
SPECIFIED								MASS		94.6.6		94.6.3		94.6.1		88.08.31		94.06.01		YAZAKI CORPORATION			